




Enjoy The View™

**HOW TO BETTER UNDERSTAND BRICKMOULD
REVISED MAY, 2010**

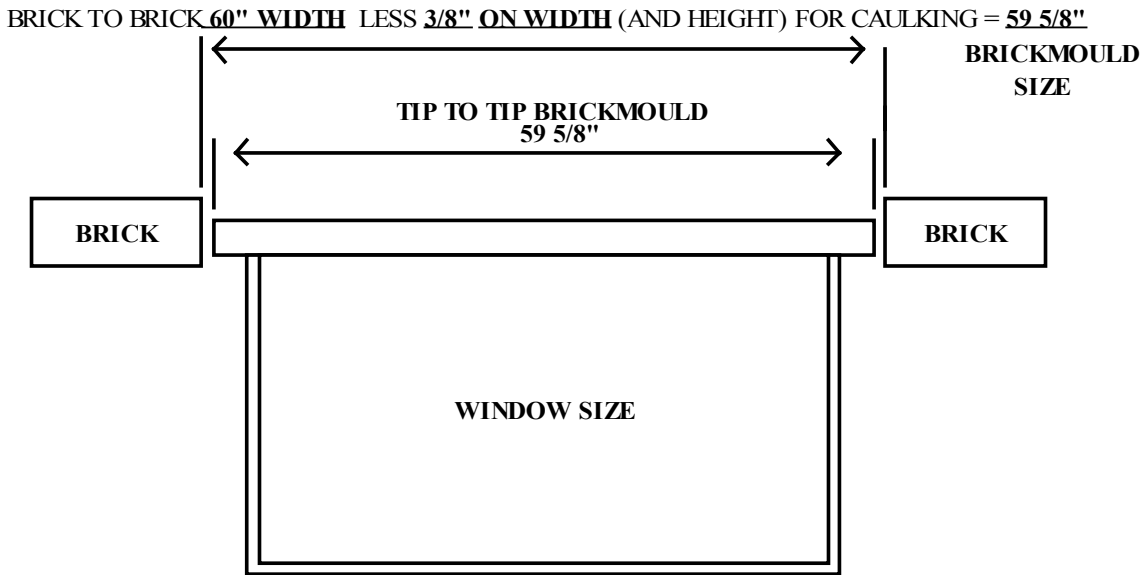

WINDOW FRAME WIDTH SIZE TO ORDER

NOTE: same deductions are needed for the "heights" unless otherwise specified

Double Hung, Single Hung and Sliders - 4000 Series	
Using 1-1/4" brickmould	59 5/8" less 2.44" = 57.19"
Using 1-1/4" brickmould fin & J	59 5/8" less 2.44" = 57.19"
Using 1-1/4" brickmould with sill	Width: 59 5/8" less 2.44" = 57.19" Height: 59 5/8" less 1.94" = 57.69"
Using 1-1/4" brickmould fin & J with sill	Width: 59 5/8" less 2.44" = 57.19" Height: 59 5/8" less 1.94" = 57.69"
Using 1-1/4" extended brickmould fin & J	59 5/8" less 2.44" = 57.19"
Using 1-1/4" extended brickmould	59 5/8" less 2.44" = 57.19"
Using 1-1/16" exterior frame extension	59 5/8" less 0.31" = 59.32"
Using 2" brickmould	59 5/8" less 3.63" = 56"
Using 2" brickmould with sill	Width: 59 5/8" less 3.63" = 56" Height: 59 5/8" less 2.56" = 57.07"
Using 3-1/2" flat trim fin & J	59 5/8" less 6.81" = 52.82"
Using 3-1/2" flat trim fin & J with sill	Width: 59 5/8" less 6.81" = 52.82" Height: 59 5/8" less 4.13" = 55.5"

Casement - 5000 Series	
Using 1-1/4" brickmould	59 5/8" less 2.44" = 57.19"
Using 1-1/4" brickmould fin & J	59 5/8" less 2.44" = 57.19"
Using 1-1/4" brickmould with sill	Width: 59 5/8" less 2.44" = 57.19" Height: 59 5/8" less 1.94" = 57.69"
Using 1-1/4" brickmould fin & J with sill	Width: 59 5/8" less 2.44" = 57.19" Height: 59 5/8" less 1.94" = 57.69"
Using 2" brickmould	59 5/8" less 3.63" = 56"
Using 2" brickmould with sill	Width: 59 5/8" less 3.63" = 56" Height: 59 5/8" less 2.56" = 57.07"
Using 3-1/2" flat trim fin & J	59 5/8" less 6.81" = 52.82"
Using 3-1/2" flat trim fin & J with sill	Width: 59 5/8" less 6.81" = 52.82" Height: 59 5/8" less 4.13" = 55.5"

Casement - 6000 Series	
Using 1-1/4" brickmould	59 5/8" less 2.44" = 57.19"
Using 1-1/4" brickmould fin & J	59 5/8" less 2.44" = 57.19"
Using 1-1/4" brickmould with sill	Width: 59 5/8" less 2.44" = 57.19" Height: 59 5/8" less 1.94" = 57.69"
Using 1-1/4" brickmould fin & J with sill	Width: 59 5/8" less 2.44" = 57.19" Height: 59 5/8" less 1.94" = 57.69"
Using 1-1/4" extended brickmould with fin & J	59 5/8" less 2.44" = 57.19"
Using 1-1/4" extended brickmould with no fin & J	59 5/8" less 2.44" = 57.19"
Using 1-1/16" exterior frame extension	59 5/8" less 0.31" = 59.32"
Using 2" brickmould	59 5/8" less 3.63" = 56"
Using 2" brickmould with sill	Width: 59 5/8" less 3.63" = 56" Height: 59 5/8" less 2.56" = 57.07"
Using 3-1/2" brickmould	59 5/8" less 6.81" = 52.82"
Using 3-1/2" brickmould 3 sides with sill	Width: 59 5/8" less 6.81" = 52.82" Height: 59 5/8" less 4.13" = 55.5"

Casement - 7000 Series	
Using 1-1/4" brickmould	59 5/8" less 2.44" = 57.19"
Using 1-1/4" brickmould fin & J	59 5/8" less 2.44" = 57.19"

Patio Door	
Using 1-1/4" brickmould	Width: 59 5/8" less 2.44" = 57.19" Height: 59 5/8" less 1.25" = 58.38"